


Rippleview IFP E-6500

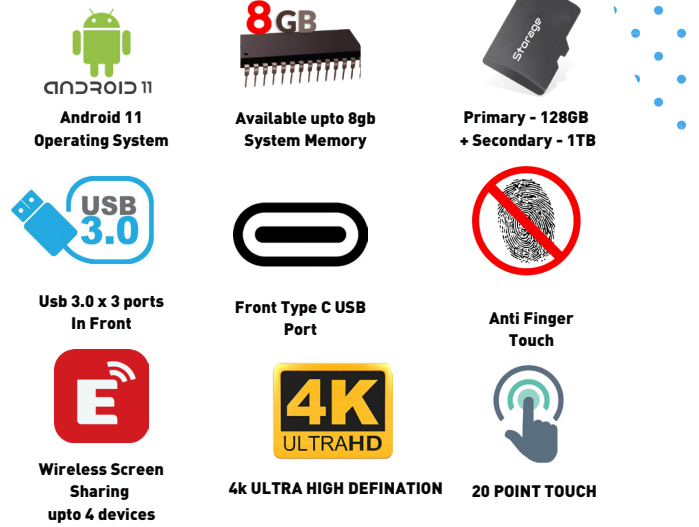

SPECIFICATION

| | | | |
|-----------------|------------------------|--|-------------------------------|
| Panel | Panel Size | 65" | |
| | Respond Time | 4ms | |
| | Visual Ratio | 16:9 | |
| | Panel Type | LG IPS Panel | |
| | Max Visual Area | 1432 (H) × 807 (V)mm | |
| | Resolution | 3840 (H) ×2160 (V) | |
| | Pixel pitch | 0.372×0.372mm | |
| | Frequency | 60Hz | |
| | Display Colors | 1.07B (10bit) | |
| | Color Saturability | 72% | |
| | Contrast Ratio (Type) | 4000:1 | |
| | Viewing Angle | 178°(H/V) | |
| | Audio-video parameters | Speaker | Soundtrack |
| Power | | | 2×20W |
| | | | |
| Touch parameter | Touch specifications | Non-contact infrared sensing technology | |
| | Support Systems | Windows10/Windows8/Windows7/Windows XP/Android/Linux/Mac OS X/Chrome | |
| | Touch Points | 20 Points Touch | |
| | Min. Identifier | 2mm | |
| | Input mode | Opaque object (finger, pen, etc) | |
| | Respond time | ≤10ms | |
| | Touch depth | ±1mm | |
| | Writing height | ≤3mm | |
| | Writing display | Single Stylus pen two-color | |
| | Output coordinates | 32767 (W) x 32767(D) | |
| System | System Version | Android 11.0 | |
| | CPU | Quad Core A55 2.1 GHz | |
| | GPU | Mali G52MP2 | |
| | RAM | 4GB / 8GB (Optional) System Memory | |
| | ROM | 32GB / 128GB (Optional) System Storage | |
| Wireless | Bluetooth | Version | 5.0 |
| | | Working Frequency | 2.4GHz |
| | | Working Distance | 0~10m |
| | | Remark | Via the wireless module SI07B |
| | | | |

| | | | |
|--------------------|------------------------------------|---------------------------|--|
| Rear I/O Interface | Wi-Fi | Version | 802.11ac/b/g/n/a/ax |
| | | Working Frequency | 2.4GHz/5GHz |
| | | Working Distance | Upto 10 meters |
| | | Remark | Via the wireless module SI07B |
| | | HDMI IN | 2 |
| | | USB 2.0 | 1 |
| Front Interface | | USB 3.0 | 2 |
| | | USB TOUCH PORT | 1 |
| | | AUDIO IN | 1 |
| | | Line OUT | 1 |
| | | Optical OUT | 1 |
| | | RS232 | 1 |
| Power | | LAN RJ45 OUT | 1 |
| | | LAN RJ45 IN | 1 |
| | | USB3.0 | 2 |
| Structure | | TOUCH USB | 1 |
| | | HDMI I | 1 |
| | | Type-C | 1 (Full functional is Optional) |
| | | Voltage | 100-240V~ 50/60Hz 4A |
| Environment | | Max. power consumption | 280W |
| | | Standby power consumption | ≤0.5W |
| | | Bare dimension | 1488.4×896.6×87.2mm |
| | Packing dimension | 1630×220×1050mm | |
| | Machine + wall mount thickness | 116.5mm (WIB9060G) | |
| | VESA hole site | 600×400mm | |
| | Wall mounting screw specifications | M8×25mm | |
| | Net weight | 45KG | |
| | Gross weight | 56KGS | |
| | Working temperature | 0°C~40°C | |
| | Working humidity | 10%~90%RH | |
| | Storage temperature | -20°C~60°C | |
| | Storage humidity | 10%~90%RH | |
| | Working Elevation | <5000m | |